



- ◆ High die-cast aluminum
- ◆ Display Coordinates
- ◆ Support pattern tour (200s memory).
- ◆ Software ID address function
- ◆ Multi-privacy mask position
- ◆ 6 programmable cruising tracks
- ◆ 128 preset positions

SPECIFICATION

Camera

Model No.	LPTZ-1000i
Day & Night	YES (ICR)
Image device	1/4" CCD
Effective pixels	752(H)X582(V)
Video output	VBS 1.0Vp-p/75Ω
White balance	Auto
AGC	Auto
Scanning frequency	15.625KHz(H) 50Hz(V)
S/N Ratio	>46dB
Horizontal resolution	480TVL
Electronic shutter	1/50~1/120,000s
Minimum illumination	1.5Lux
Zoom ratio	Optical 10X, digital 10X, total 100X

Mechanical/Electrical

Pan speed	0°~120°/s
Tilt speed	0°~90°/s
Pan angle	360° Continuously
Tilt angle	-90°~+90°
Preset position	128 positions
Tour	6
Communication	Multi-protocol, RS485 control
Relative humidity	90% without agglomeration
Work temperature	-10°C~+50°C
Power supply	DC12V
Power consumption	12W
Weight	1.5Kg

BRACKET/HOUSING INFORMATION


Indoor Wall mount Bracket



(Optional)

DIMENSIONS

Standard Camera

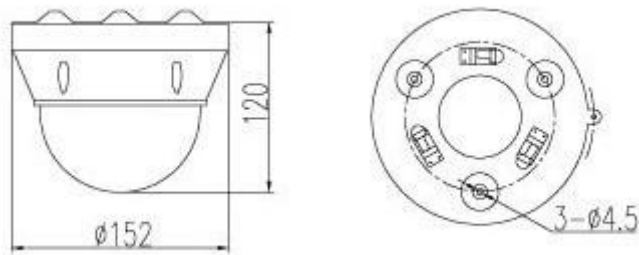

Camera with indoor bracket

